

## Rockwood Mounting Detail - Push and Pull Bars

The global leader in  
door opening solutions

For Installation Assistance, Call Rockwood Products at 800-458-2424 • [www.rockwoodmfg.com](http://www.rockwoodmfg.com)

### Sizing of Push Bars

#### Flush Doors

Door width:

- minus 5" for bent end bars
- minus 5" for square end post mount bars
- minus 7" for round end post mount bars


#### Stile and Rail Doors or Doors with Lites

Door width:

- minus width of one stile.

**Caution:** Always confirm bars will not interfere with jamb or cause pinching hazard.

**Caution:** On narrow stile doors, be sure push bar base fits on the stile and bar does not interfere with the stop.

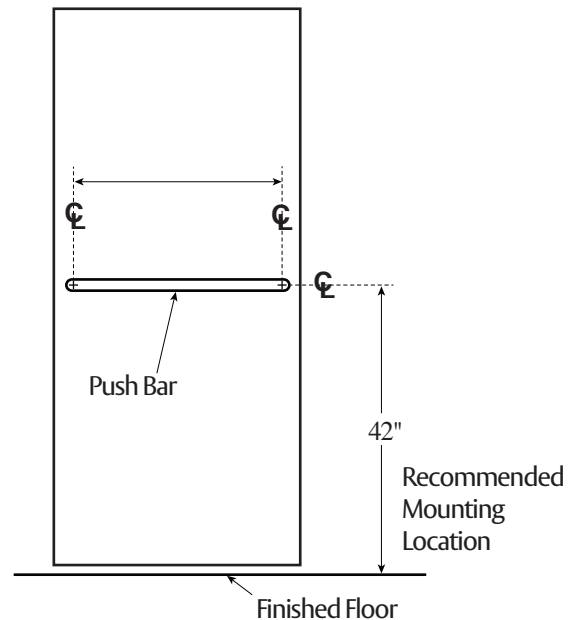


### Handing of Doors

The handing of a door is determined from the outside of the opening.

#### Standing outside the door:

- If hinges are on the right, it is a right hand door.
- If hinges are on the left, it is a left hand door.
- If door opens away from you, it is a regular bevel door.
- If door opens toward you, it is a reverse bevel door.

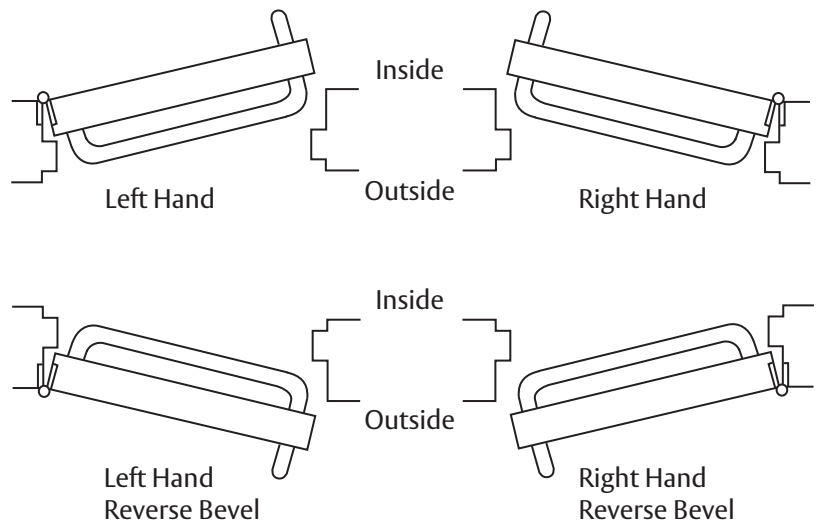

**NOT TO SCALE**

300 Main Street  
Rockwood, Pennsylvania 15557  
P: 800.458.2424 | F: 800.922.9212  
[www.rockwoodmfg.com](http://www.rockwoodmfg.com) | [orders.rockwood@assaabloy.com](mailto:orders.rockwood@assaabloy.com)

Copyright © 2017, Rockwood Manufacturing Company, an ASSA ABLOY Group company. All rights reserved.  
Reproduction in whole or in part without the express written permission of Rockwood Manufacturing Company is prohibited.